

Forman Awnings & Construction, LLC.
2101 Lathrop Avenue
Racine, WI 53405
262-634-3082

Date: 6-21-2013

RUDY'S BAR
2515 Douglas Ave.
Racine, WI 53402
Owner: Dale Decker

Sunbrella Marine Fabric specifications

Sunbrella marine Fabric is water and mildew resistant, and well suited for awnings, boat tops, covers, curtains, sail bags, and other marine uses. Backed by a manufacturer's ten-year limited warranty.

Fabric: Solution-Dyed Woven Acrylic

Finish: Fluorocarbon

Width: 60 inches

Weight: 9.25 oz. per sq. yd.


Warranty

This limited warranty protects the original purchaser should Sunbrella fabric become unserviceable due to color or strength loss from normal usage and exposure conditions, including sunlight, mildew and atmospheric chemicals.


The limited warranty coverage period is ten years from the date of original installation.

This limited warranty covers Sunbrella Awning fabric and Sunbrella marine fabric only. This limited warranty is valid with proof of purchase from the original purchaser. This limited warranty does not cover normal fabric care and cleaning; damage from misuse, abuser, or improper installation. Glen Raven's liability is expressly limited to this warranty. Glen Raven reserves the right to inspect the fabric submitted for claim.

Glen Raven will supply new equivalent fabric to replace the fabric that becomes unserviceable. In the first eight years of the warranty period, Glen Raven will provide replacement fabric to the purchaser at no cost. During the ninth year, Glen Raven will provide replacement fabric to the purchaser at the then-current selling price, less a 30% discount. During the tenth year, Glen Raven will provide replacement fabric to the purchaser at the then-current selling price, less a 15% discount. Replacement fabric is warranted under the remaining term of the original warranty.

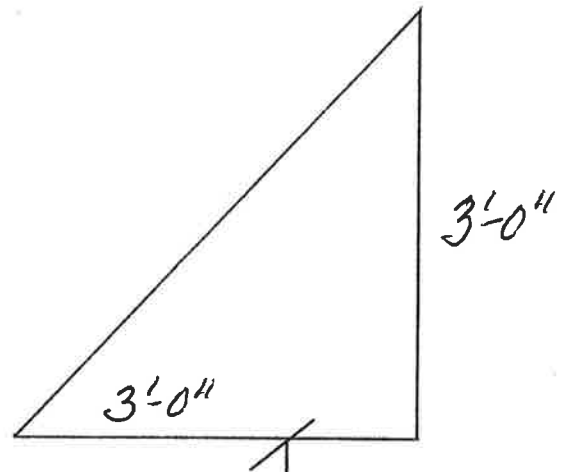

SIZE - 17'-0" WIDE x 3'-0" x 3'-0"

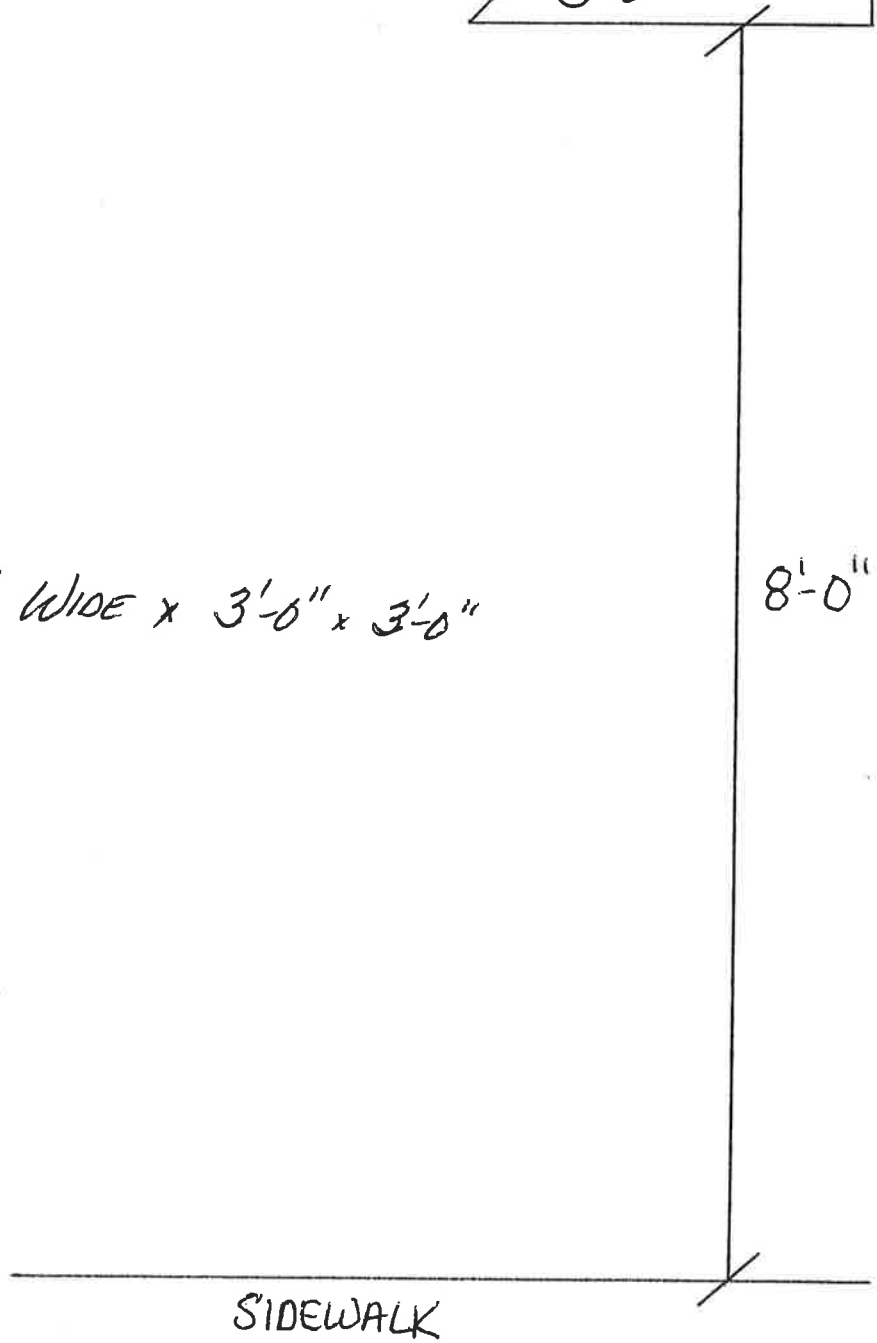

Method of Fabrication

This awning will be constructed using 1" x 1" Square aluminum Tubing that will be welded together. The canvas material will then be stretched onto the frame for a taut appearance. The awning will be installed so that the bottom of the awning is at least 8'-0" from the sidewalk.

Installation

The awning will be mounted over the sidewalk on the front of the building. "Z" brackets will be mounted onto the brick to secure the awning using 2-3/4" Tapcons or wedge anchors.



Rudy's

CERIFIED PURVEYORS OF THE High Life

St. Pauli Beer

NO PARKING 3:30 PM - 6:00 PM

TWO HOUR PARKING 9AM-3:30PM

NOI-77

NOI-77

