



Application for Façade Grant

Applicant Name: (arth, y
Address: 1346 Washington Ave City: Rocine 4
State: <u>LII</u> Zip: <u>534</u>
Telephone: 4/4639 7405 Cell Phone:
Email: Comrgo@gmail.com / Dlarkinje@icloud.com
Agent Name:
Address: City:
State: Zip:
Telephone:Cell Phone:
Email:
Property Address (Es): 1346 Washing for Ave
Current Zoning: M, Xed USE Campele 19 / Residential
Current/Most Recent Property Use: 18sidential Uffer & Commercial lower
Proposed changes: (use additional sheet if necessary)

Numerous areas of the City have design guidelines which are specific to projects and must be adhered to. The design guidelines can be found at the following link under the design review district heading on the page: https://www.buildupracine.org/business-tools/planning/

For properties not within a specific design area, adherence to Commercial façade design guidelines is required.











If the required supplemental materials, which constitute a completed application, are not submitted, the application will not be processed.

Required Submittal Format

- 1. An electronic submission via email/USB drive/CD/Download link; and
- 2. One (1) paper copy, no larger than 11" x 17" size.

Required Submittal Item	Applicant Submitted	City Received
Completed Façade Grant Application	1	
 Explanation of how proposed project is consistent with applicable design guidelines from: https://www.buildupracine.org/business-tools/planning/ 	A	
 3. Minimum of two (2) bids from licensed and bonded contactors a. Detailed cost information by element (cost of windows, cost of door, cost of wall repair, etc. listed separately); and b. Proposed schedule to begin and complete work. 	S/	
 4. Written description of proposed use of the property, including: a. Hours of operation b. Anticipated delivery schedule c. Maintenance plan d. General use of the building and lot 	d	
 5. Proposed improvements plan (drawn to scale), including: a. Building elevations; and b. Identification as to whether all elements are "Existing" or "Proposed"; and c. Include any signage; and d. Any proposed elements require product samples as indicated in #5 below. 	A	
 6. Product samples or catalog/product cut sheets and/or images a. Physical material sample of product; or b. Product cut sheet; or c. Photo of exact product to be installed. d. Any change in exterior coloring requires submission of color card samples for the exact specification and manufacturer to be utilized AND a diagram indicating where on the building each color will be used. 	4	
 7. Photos of the project area as follows: a. Overall wall photo showing entire building wall(s) b. Close up photos of the existing elements which are to be replaced or repaired (windows, doors, cornice, trim panels etc.) 	A	









Acknowledgement and authorization signatures

A façade grant is not like a permit; applying does not mean it will be approved.

The façade grant is a reimbursement program (50% of eligible project costs up to \$10,000), all project costs must be paid in advance and the grant money will be awarded after successful final inspection from the City Building and Inspection Division and Planning Division. Work which is not completed as approved (assuming the application is successful) is grounds for non-payment of funds or reduced payment of grant funds.

If awarded, the applicant will be required to submit a W-9 form to receive funds and also complete an agreement before any work eligible for reimbursement is completed.

The signature(s) hereby certify that the statements made by myself and constituting part of this application are true and correct. I am fully aware that any misrepresentation of any information on this application may be grounds for denial or processing of this application. By signing the application, I have read and understand the rules and procedures of the façade grant program and authorize a City Development employee to take any photos from my property to better understand the proposal if needed.

Property Owner Signature (acknowledgement	and authorization):	Date:_ <u>03/01/2</u>
Applicant Signature (acknowledgement):	200	Date: 05/01/23







Façade Grant Application info

- 2. Proposed Project is consistent with the Plans and vision for uptown for the following reasons. Revitalizing a building that needed structural improvements and façade upgrade to bring relevant business back to the uptown area. The nostalgia of the building remains intact as we are cleaning and tuck point the areas of cream city brick that needs it. The fypon dentil and lighting upgrades the front of the building alone with larger glass pane windows to improve image and identity of the building but keep its original detail in essence combining new and old styles. The upper goes from a two-bedroom unit to two separate modern efficiency studio apartments. The first floor has been outfit for interchangeable business types, but we have currently signed a lease with a barber shop that will occupy the spaces. In the basement which previously was unusable space wise we have excavated and poured new concrete and will eventually make it a shop/office from the back side of the building as well we have graded and excavated the driveway so our tenants/clients from both 1334/1346 have off street parking.
- 3. Bids attached are from
 - A. Milwaukee Plate glass (Bid we are accepting)
 - **B.** Greene Glass
- 4. Written description of proposed use of property:
 - A. Hours of operation

 Monday Sunday 9AM-7PM
 - B. Delivery of façade windows with in 3-4 weeks
 - C. Owner maintained by COMRGE LLC.

D. Barber Shop first Floor with 2 studio apartments on the second floor. The lot will be used for tenant parking for both 1346/1334 and some customer parking for the Barber Shop.

5. Proposed improvements plan:

- A. Attached façade detailed drawings
- B. proposed and existing. The windows, lights, doors and colors will be updated attached is the plans as designed with the Architect.
- C. Attached is the product sample for the lights.



Radine, WI 53402

3316 N Wisconsin St

ть_учћаѕ@уаћоо.сот 9876-1/66-797

STRUCTY PROHIBITED.

STANDARD STANDARD

RPY Architecture, LLC

1346 WASHINGTON AVE. **FACADE IMPROVEMENTS:**


-KICHLER 12" UP/DOWN CYLINDER 3,000K LED LIGHT FIXTURES. ARCHITECTURAL BRONZE. NEW 36x80 WOOD RESIDENTIAL DOOR-STAINED. NEW STOREFRONT WITH BLACK ANODIZED FRAMING. -EXISTING BRICK TO BE CLEANED & TUCKPOINTED. WAINSCOT W/ 1/4" HALF ROUND PANEL MOLDINGS. -MDO BOARD OVER NEW STUD FRAMING. -FYPON DENTIL MOLDING MLD434-16 FYPON DENTIL MOLDING MLD706-16 SCALE: 1/2" = 1'-0" 3-6/4" 67 3-TENANT -MAILBOX 5'-1" 25'-8" * PLAN 6'-101/2" -5% .0-Z .V.6

1346 WASHINGTON AVE. FACADE

SCALE: 1/2" = 1'-0"

C:/OSEIX/CMUBL/DOCULUBUR/DODA/ICUBICC/CSCZ/1246 MASHIBIDIDIA BERGREAL/CMUBL/DOCULUBUR/DOCULUBUR/DOSCG L/30/20 FM/, US/05/20 FM//

PAINT- BENJAMIN MOORE-RIVER GORGE GRAY 1537

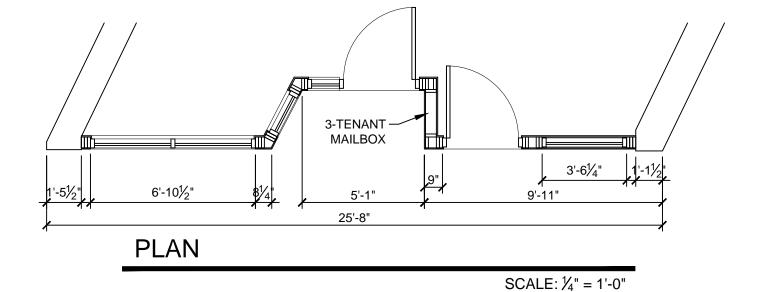



1346 WASHINGTON AVE. FACADE

SCALE: ½" = 1'-0"

FACADE IMPROVEMENTS: 1346 WASHINGTON AVE. Racine, WI 53403

(O)

RPY Architecture, LLC

3316 N Wisconsin St Racine, WI 53402

PLAN DATES: 3/26/2022 4/12/2022

SHEET

1 OF 1

9 2921 Kichler Lighling LLC All Flights Received

SPECIFICATIONS

Certifications/Qualifications

Class 2 Yes

Title 24 Compliant Yes

www.kichler.com/warranty

Dimensions

Base Backplate 5.00 X 5.00 Extension 6.50"
Weight 3.08 LBS
Height from center of Wall opening 6.25"

(Spec Sheet)

Height 12.00" Width 5.00"

Electrical

Input Voltage Dual (120/140)V

Light Source

Delivered Lumens 550
Expected Life Span (Hours) 40000
Lamp Included Integrated
Light Source LED
Max or Nominal Watt 15W
of Bulbs/LED Modules 1

Mounting/Installation

Interior/Exterior Exterior
Location Rating Wet
Mounting Style Wall Mount

Photometrics

Color Rendering Index 90
Color Temperature Range 3000
Kelvin Temperature 3000K

FIXTURE ATTRIBUTES

Housing

Primary Material ALUMINUM

Product/Ordering Information

SKU 11251AZT30

Finish Textured Architectural Bronze

Style Contemporary UPC 783927453097

Finish Options

Textured Architectural Bronze

Textured Black







3737 Douglas Ave. Racine, WI 53402 <u>Rasmremodeling@gmail.com</u> 262-994-4050 DATE: MAY 4, 2022 INVOICE # 5119

Expiration Date: June 15th, 2022

TO COMERGE LLC 1346 Washington Ave. Racine, WI 53402 414-639-7405 Attn. Jimmy

1346 WASHINTON AVE. FRONT FACADE REMODEL

LINE TOTAL

Build out Temporary wall on front of Building 8' tall
Remove existing front facade and dispose of material/ debris
Buildout new façade following Architectural Plans provided by Robert P Yuhas
RPY Architecture, LLC/plans attached to quote

Start Date: 05/16/2022

Completion Date: 06/01/2022

\$23,200.00

Quotation prepared by: Mike Rasmussen

X Michael Rasmussen

This is a quotation on the goods named, subject to the conditions noted below: Job to be competed in a timely fashion. Job requires 25% down at signing and payment in full upon completion. Lien waver issued after final payment. Read the Contract Additional Provisions to agree before signing.

To accept this quotation, sign here and return: X

We're not happy, till you're happy!



1120 N. Main Street Racine, WI 53402 Phone:262-632-0550 Fax: 262-632-3040

Email: rpk@greeneglassllc.com

April 26, 2022

Project: 1346 Washington Ave.

Storefront Façade

Install Tubelite T14000 Commercial Store Front Metal For (3) Sets of Windows. Includes 1" O/A Low E Insulated Glass and Black Anodized Finish.

- (1) Main Entry Door with Sidelite and Transom.

 Medium Stile Door with Thumbturn Lock,
 Full Glass and Black Finish.
- (1) Upstairs Entry Door with Glass in Upper Half and Panel in Lower Half with 4" Mid Rail. Medium Stile Door with Paddle Handle and Black Finish

Estimated Cost: \$ 24,300.00

BID PROPOSAL

DATE:

April 26, 2022

Project Name:

Hear Wisconsin

Location:

10243 W. National Ave., West Allis, WI

Milwankes Piace Glas

ATTN: Dan

To: Stier Const.

11233 W Greenfield Ave. West Allis, WI 53214

414-771-5660 Fax 414-771-7924

We propose to furnish and install:

FRAMING:

Kawneer 2" X 4 1/2" center glazed 451T for (1) 83" X 88", (1) 24" X 88", (1) 42" X 88"

windows and (1) 61" X 112" entrance.

DOORS:

(1) 36" X 84" medium stile door with 10" bottom rail.

HARDWARE:

continuous hinge, push pulls, lock with cyl/t.t., surface closer.

GLASS:

1" clear insulated low e.

FINISH:

All aluminum framing and doors to black anodized.

CLARIFICATIONS:

NO DEMO. NO WOOD DOOR OR FRAME FOR

EXCLUSIONS:

1) Final cleaning is excluded. We will remove labels and excess scalants from framing and glass surfaces at time of installation.

2) Glass is not warranted against breakage. We will replace broken glass caused directly by our employees at time of installation.

3) Furnishing of temporary enclosures, temporary material protection and removal or resetting of temporary enclosures is excluded.

4) Customer to provide solid anchoring at perimeter conditions to withstand loads.

5) Mirrors

FOR THE SUM OF

DOLLARS

\$22,173.00

ALTERNATES:

Bid we are accepting